

V BOT

4K HDMI Motorized Head




Experience the world around you.
Never miss a beat again.




10 presets



HDMI Reclocker

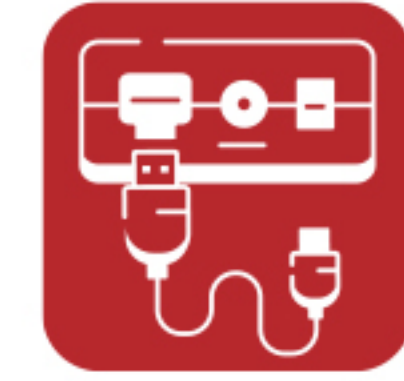

PoE+/Ethernet

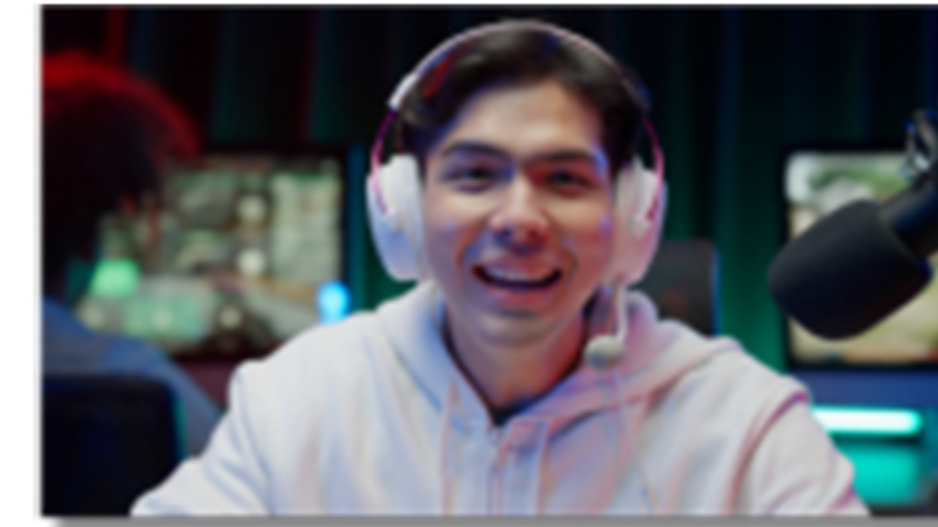

SALRAYWORKS

We reinvent the way of live stream

www.salrayworks.com

Capture moments with ease using our V bot which stores up to 10 presets. From pan and tilt control to powering your camera and controlling its zoom lens via LANC or other protocols, The head easily mounts to most tripod legs and with an optional bracket, it can be mounted on a wall or ceiling.


Front

Aluminum Quick Release Plat +
Clamp Adaptor Mount



Tally Light and
Status LED

Rear

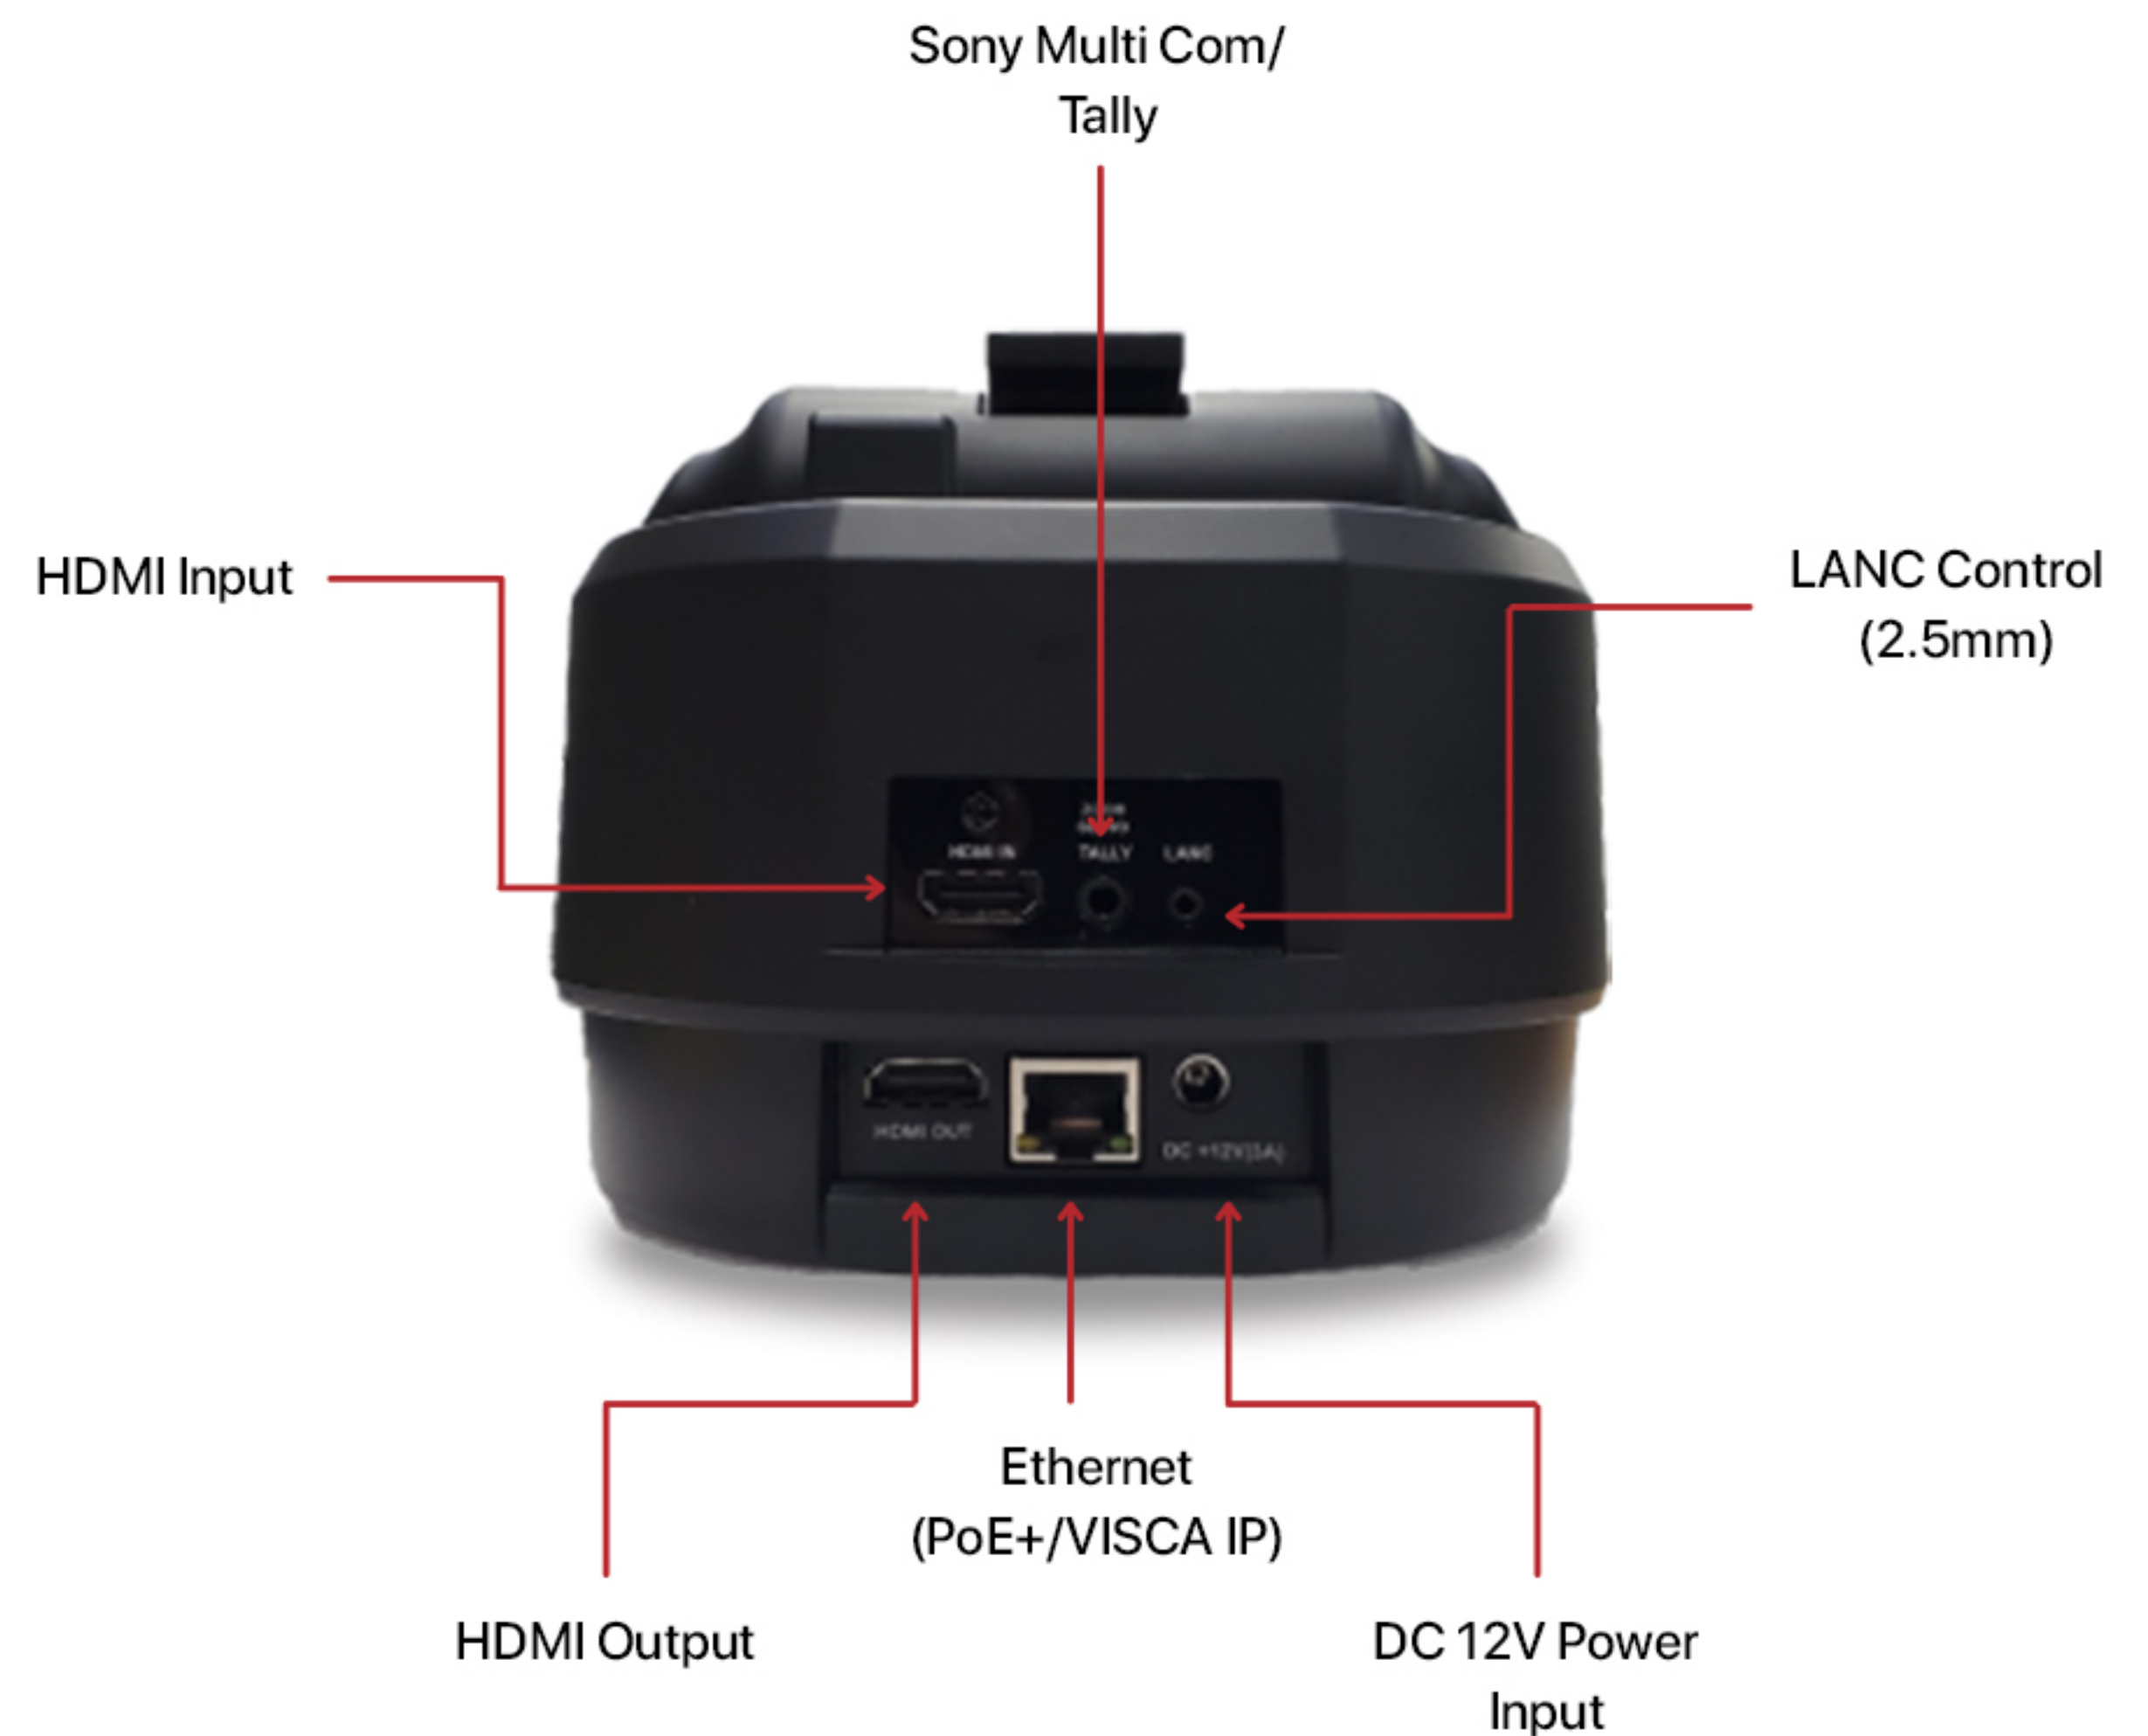

Key Features


- Can pan up to 340 degrees, tilt down 35 degrees, tilt up 20 degrees, at a rate of 15 degrees per second
- Operates quietly and smoothly, making it ideal for in-studio shooting and live streaming
- Can be powered via PoE+ (Power over Ethernet)
- Controlled remotely for zoom, focus, and IRIS adjustments using the 2.5 mm LANC/MULTI/CANON XC connection
- Stores and recalls up to 10 positions with precision less than 0.1 degrees, ensuring accurate location memorization for immediate shooting
- All menus can be accessed remotely for cameras compatible with the CANON XC protocol

SALRAYWORKS

We reinvent the way of live stream

www.salrayworks.com

Canon XC/LANC to Sony Multi Compatible

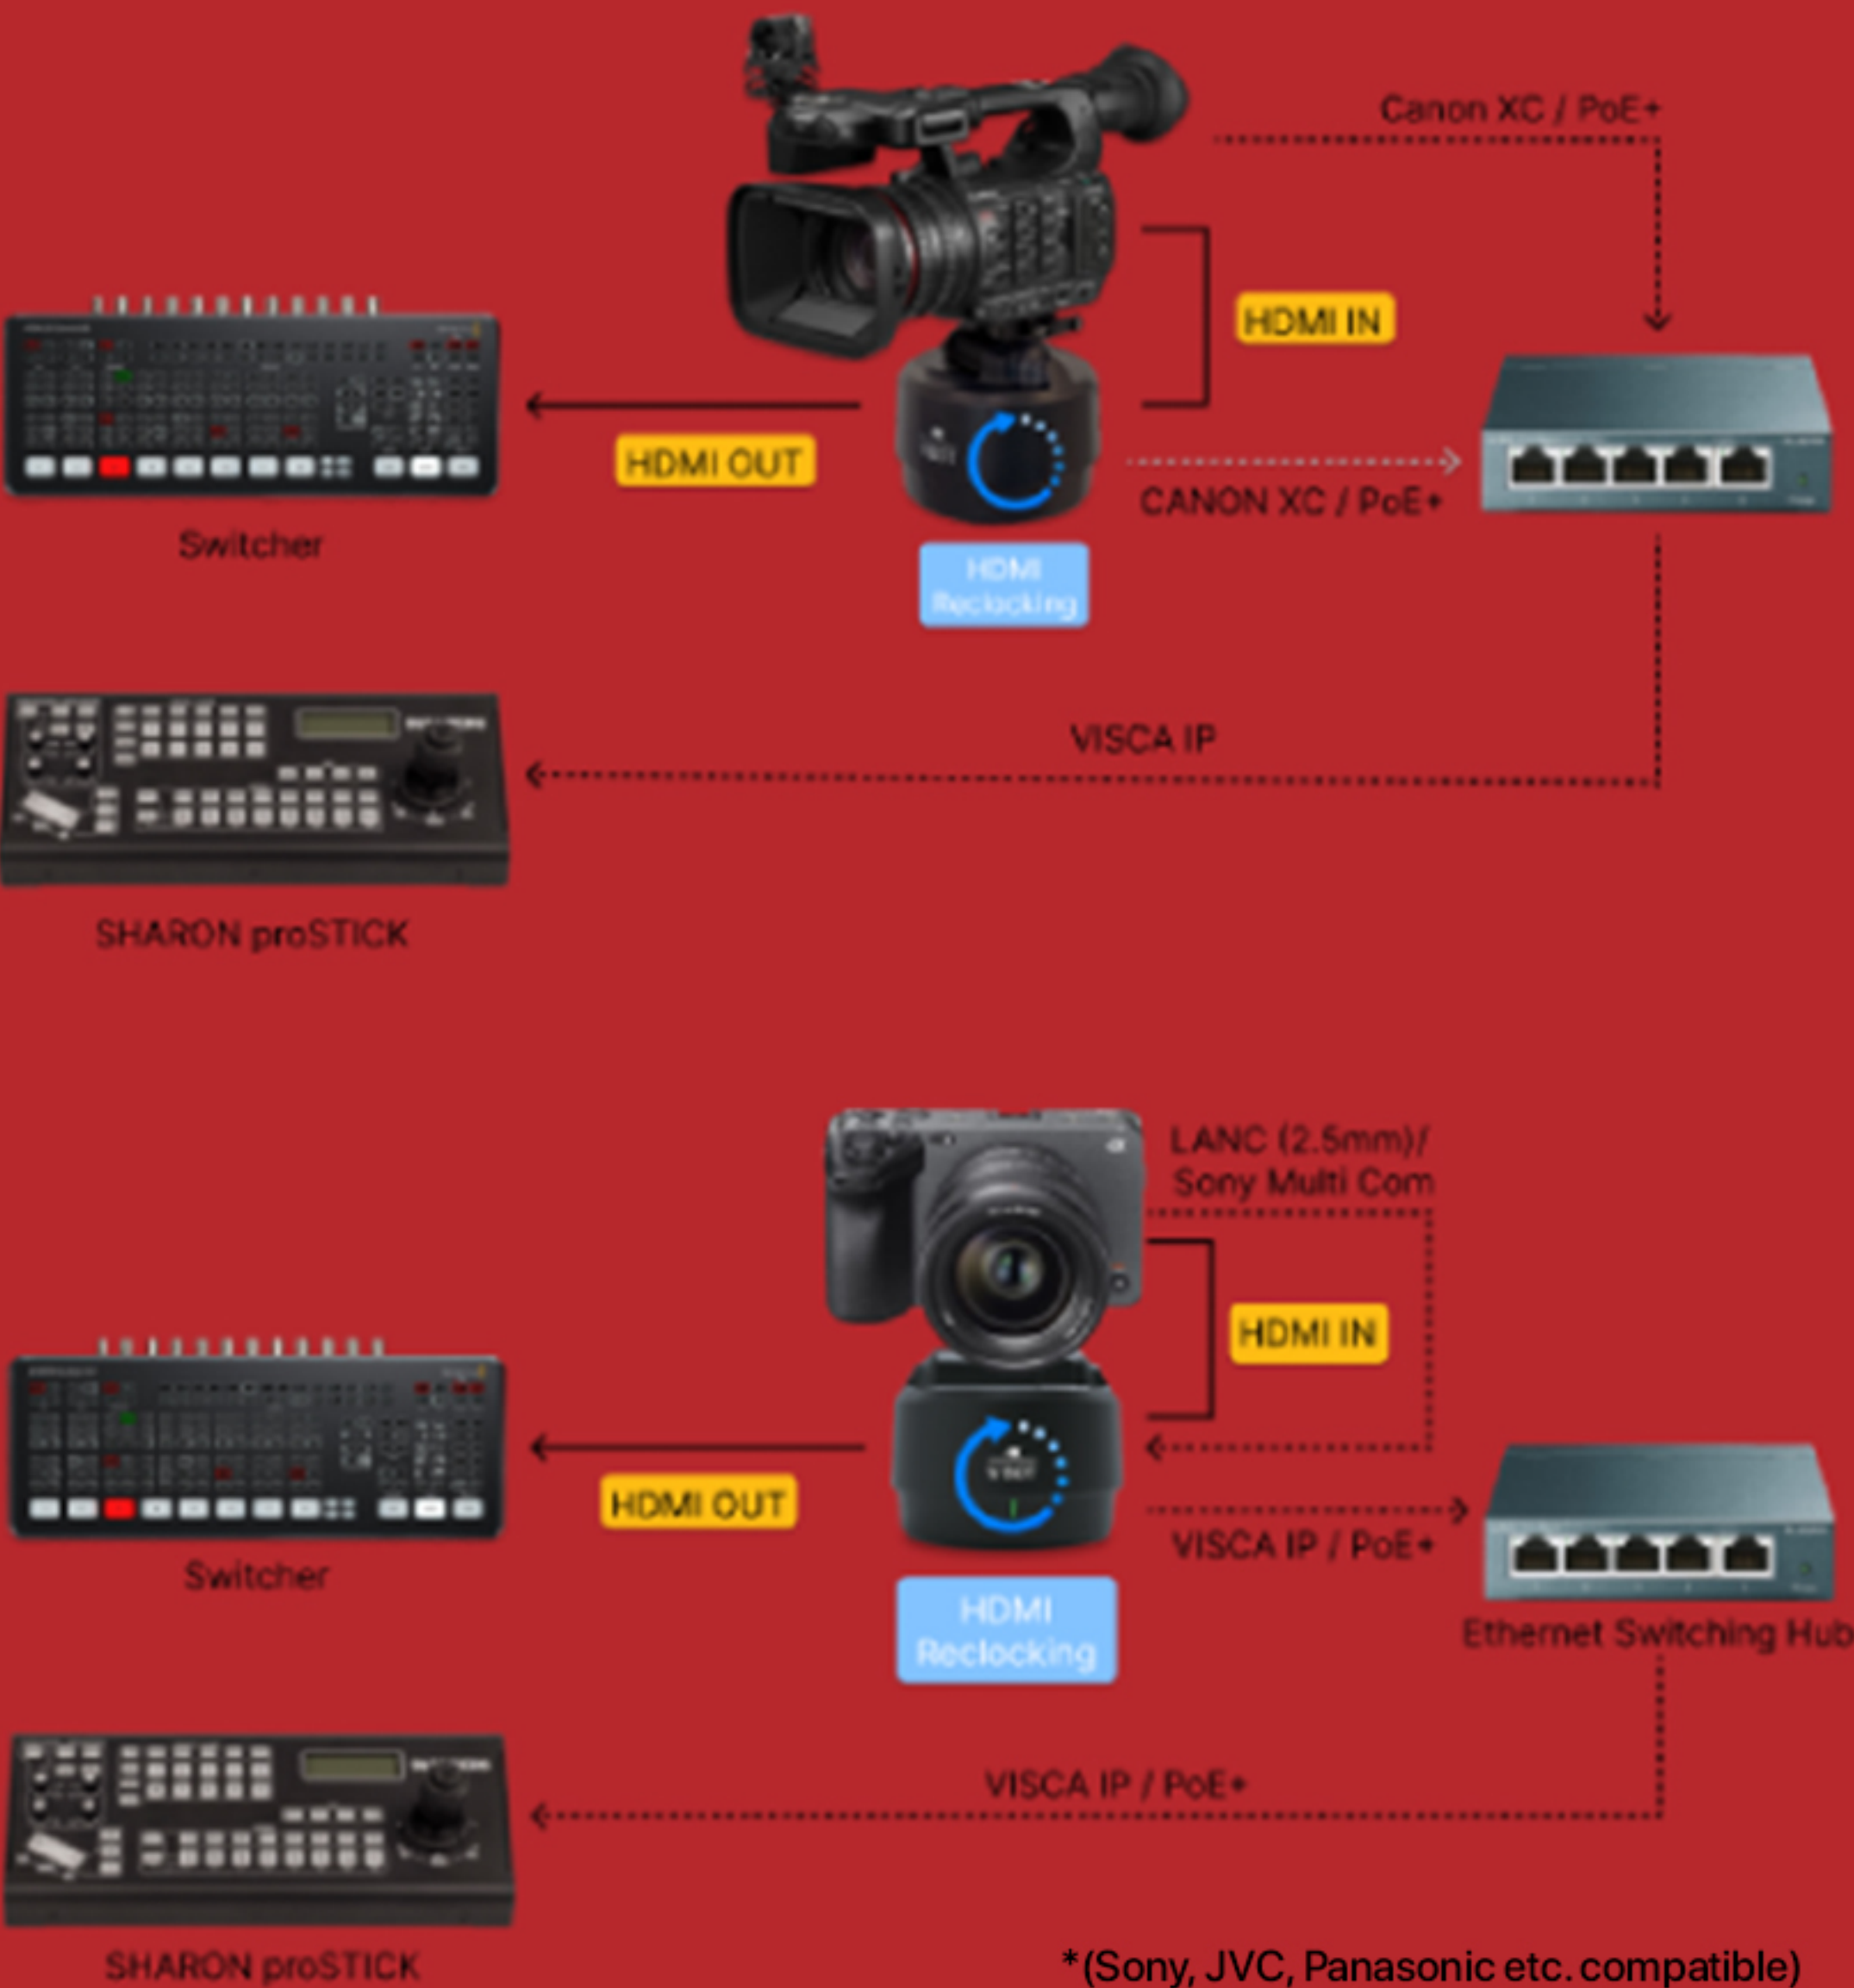

Specifications

	•Robotic Pan / Tilt Head
INPUT	•Supports Sony VISCA operation via Ethernet connection •POE+ (Power over Ethernet – 802.3at) support •HDMI 2.0 video/audio input
PAN	Turning radius 170 degrees to the right and 170 degrees to the left (340 degrees) ** 360 degrees possible when the sensor is off** Speed: 180 degrees in 10 seconds (Variable speed in 1~24 steps)
TILT	Turning radius up 20 degrees down 35 degrees Speed: 15 degrees per second (Variable speed from 1 to 24 steps)
PRESET	10 position Save Save Pan/Tilt Position Save , Speed Save Focus Zoom In/Out Position Save , Speed Save Pan/Tilt *4 (at CANON XC)
EX-CONTROL	1.LANC input Camera Remotely control Zoom In/Out (Speed 1~12 step), Focus 2. Sony Multi Control (option Cable Requires) 3. Canon XC Protocol Compatible.
TALLY	Internal / external Tally support
OUTPUT	HDMI 2.0 video/audio output 4K resolution support Tally Light
MANAGEMENT	Front status LED support Support for remote firmware update
PHYSIS	Dimension : 128(H) X 157(W) X 157(D) Operation Temperature : 0~45°C Weight : 1.87 Kg Power Consumption: Max 20W

Download V BOT Manual



Thank you

Thank you for taking the time to explore our new product brochure. At SalrayWorks, we are passionate about making streaming easier through innovative technology.

Whether it's our high-performance hardware or intuitive software solutions, we're committed to enhancing your streaming experience.

Stream smarter, stream better with SalrayWorks!

SALRAYWORKS

We reinvent the way of live stream

www.salrayworks.com

Contact Us

Feel free to reach out with any questions or feedback.

Your insights drive our continuous improvement, and we're excited to have you on this journey with us.

Direct Quote



 anyhelp@salrayworks.com



MADE BY SOUL IN SEOUL